


PARCOLYS FLOORING PARCOLUX®

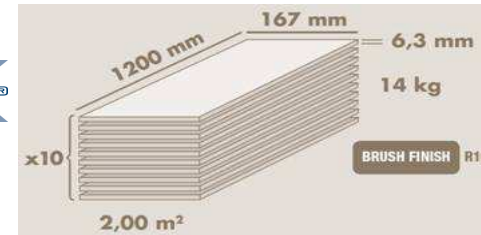

Edition 07.2015

| | Norm | Unit | Standard | Result |
|-------------------------------|--------------------|-------------------------|---------------------------------|---------------------------------|
| warranty | domestic use | see warranty conditions | | 20 year |
| warranty | commercial use | see warranty conditions | | 5 year |
| abrasion class | EN13329 | | | AC5 |
| Taber: wear resistance | EN13329 | IP | >=6000 | >=6000 |
| impact class | EN13329 | | | IC3 |
| clic system | | | | Uniclic |
| stain resistance | EN13329/EN438-2 | class | >=4 | 5 |
| UV light fastness | EN ISO 105-B02 | class (blue wool scale) | | >=6 |
| surface soundness | EN13329/EN311 | N/mm ² | >=1,00 | >=1,50 |
| static indentation | EN13329/EN433 | mm | <=0,01 | <0,01 |
| castor chair effect | EN13329/EN425 | | no damage | no damage |
| furniture leg effect | EN13329/EN424 | | no damage | no damage |
| moisture swelling | EN13329 | % | <=18 | 0 |
| slip resistance | EN14041/EN13893 | μ | DS (>=0,3) | DS |
| slip resistance | DIN51130 | | | R10 |
| slip resistance | XP P 05-011 - 2005 | PN | | PN 12 |
| thermal resistance | ISO8302 | m ² K/W | | 0.049 |
| floor heating | | | | OK (ask specific instructions) |
| floor cooling | | | | OK (ask specific instructions) |
| fire classification | EN14041/EN 13501-1 | class | C _{fl} -S ₁ | C _{fl} -S ₁ |
| scratch resistance | EN438-2 | Newton | | >=3 |
| dimensional stability | EN13329,Annex C | mm | <=0,90 | <=0,1 |
| formaldehyde emission | EN14041/EN717-1 | mg/m ³ | <=0,124 | 0 |
| pentachlorophenol emission | EN14041/EN12673 | mg/m ³ | 0 | 0 |
| VOC emission | French label | | | A+ |
| CE Declaration of Performance | | | | DOP-CPR-600 |